


50 链轮

50 SPROCKETS

Pitch 节距: 15.875
 Inner width 内节内宽: 9.53
 Roller-ø 滚子直径: 10.16

| Teeth | groove width | measure Diam |
|-------|--------------|--------------|
| 8 | | 22 |
| 9 | | 29 |
| 10 | 6.4 | 34 |
| 11 | | 39 |
| 12 | | 44 |
| 13 | | 49 |

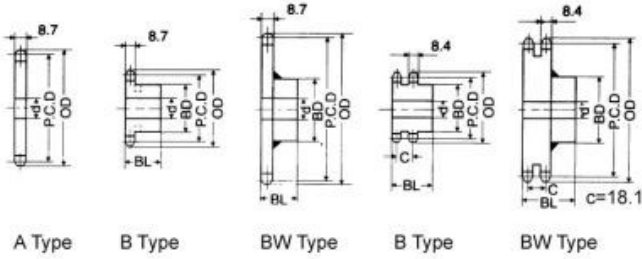

Dimensions millimeters

| 齿数 No. of Teeth | 外径 Outside Diam. OD | 节径 Pitch Diam. P.C.D | 底径 Bottom or Caliper Diam. | B 型单排 Type "B" SINGLE STRAND | | | | | A 型 Type "A" | | | B 型双排 Type "B" DOUBLE STRAND | | | | | | |
|-----------------------|------------------------------|-------------------------------|-------------------------------------|------------------------------|-------|-------------------|--------------------|--------------|----------------|-------------------|--------------|------------------------------|--------|-------|-------------------|--------------------|--------------|----------------|
| | | | | 搭子 HUB | | 工艺孔 Stock Bore | 最大加工孔 Max. Bore | 重量 Wt. kg | 材料 Material | 工艺孔 Stock d | 重量 Wt. kg | 材料 Material | 搭子 HUB | | 工艺孔 Stock Bore | 最大加工孔 Max. Bore | 重量 Wt. kg | 材料 Material |
| | | | | 直径 BD | 总高 BL | | | | | | | | 直径 BD | 总高 BL | | | | |
| 8 | 48 | 41.48 | 31.32 | ★22 | 25 | 11.5 | 13.5 | 0.12 | | | | | | | | | | |
| 9 | 53 | 46.42 | 35.55 | ★34 | 25 | 11.5 | 18 | 0.20 | | | | | | | | | | |
| 10 | 58 | 51.37 | 41.21 | ★40 | 25 | 14.5 | 22 | 0.27 | 14 | 0.14 | | | | | | | | |
| 11 | 64 | 56.35 | 45.61 | ★45.5 | 25 | 14.5 | 28 | 0.33 | 14 | 0.17 | | | | | | | | |
| 12 | 69 | 61.34 | 51.18 | ★50 | 25 | 14.5 | 30 | 0.41 | 14 | 0.20 | | | | | | | | |
| 13 | 74 | 66.34 | 55.69 | ★51 | 25 | 14.5 | 32 | 0.46 | 14 | 0.23 | | | | | | | | |
| 14 | 79 | 71.34 | 61.18 | 52 | 25 | 14.5 | 32 | 0.52 | 14 | 0.27 | | | | | | | | |
| 15 | 84 | 76.35 | 65.78 | 57 | 25 | 14.5 | 35 | 0.62 | 14 | 0.30 | | | | | | | | |
| 16 | 89 | 81.37 | 71.21 | 62 | 25 | 14 | 40 | 0.72 | 14 | 0.35 | | | | | | | | |
| 17 | 94 | 86.39 | 75.87 | 67 | 25 | 14 | 45 | 0.83 | 14 | 0.40 | | | | | | | | |
| 18 | 100 | 91.42 | 81.26 | 72 | 28 | 14 | 48 | 1.00 | 14 | 0.45 | | | | | | | | |
| 19 | 105 | 96.45 | 85.96 | 73 | 28 | 14 | 48 | 1.10 | 14 | 0.48 | | | | | | | | |
| 20 | 110 | 101.48 | 91.32 | 73 | 28 | 14 | 48 | 1.20 | 14 | 0.50 | | | | | | | | |
| 21 | 115 | 106.51 | 96.05 | 73 | 28 | 14 | 48 | 1.20 | 14 | 0.60 | | | | | | | | |
| 22 | 120 | 111.55 | 101.39 | 73 | 28 | 16 | 48 | 1.30 | 16 | 0.66 | | | | | | | | |
| 23 | 125 | 116.58 | 106.15 | 73 | 28 | 16 | 48 | 1.30 | 16 | 0.72 | | | | | | | | |
| 24 | 130 | 121.62 | 111.46 | 73 | 28 | 16 | 48 | 1.40 | 16 | 0.78 | | | | | | | | |
| 25 | 135 | 126.66 | 116.25 | 73 | 28 | 16 | 48 | 1.50 | 16 | 0.85 | | | | | | | | |
| 26 | 140 | 131.70 | 121.54 | 73 | 28 | 16 | 48 | 1.50 | 16 | 0.90 | | | | | | | | |
| 27 | 145 | 136.74 | 126.35 | 73 | 28 | 16 | 48 | 1.50 | 16 | 1.00 | | | | | | | | |
| 28 | 150 | 141.79 | 131.63 | 73 | 28 | 16 | 48 | 1.60 | 16 | 1.05 | | | | | | | | |
| 29 | 155 | 146.83 | 136.45 | 73 | 28 | 16 | 48 | 1.70 | 16 | 1.12 | | | | | | | | |
| 30 | 161 | 151.87 | 141.71 | 73 | 28 | 16 | 48 | 1.80 | 16 | 1.20 | | | | | | | | |
| 31 | 166 | 156.92 | 146.55 | 73 | 28 | 16 | 48 | 1.85 | 16 | 1.30 | | | | | | | | |
| 32 | 171 | 161.96 | 151.80 | 73 | 28 | 16 | 48 | 1.90 | 16 | 1.35 | | | | | | | | |
| 33 | 176 | 167.01 | 156.66 | 73 | 28 | 16 | 48 | 2.00 | 16 | 1.45 | | | | | | | | |
| 34 | 181 | 172.05 | 161.89 | 73 | 28 | 16 | 48 | 2.10 | 16 | 1.55 | | | | | | | | |
| 35 | 186 | 177.10 | 166.76 | 73 | 28 | 16 | 48 | 2.20 | 16 | 1.65 | | | | | | | | |
| 36 | 191 | 182.14 | 171.98 | 83 | 35 | 16 | 55 | 2.85 | 16 | 1.75 | | | | | | | | |
| 37 | 196 | 187.19 | 176.86 | 83 | 35 | 16 | 55 | 2.95 | 16 | 1.85 | | | | | | | | |
| 38 | 201 | 192.24 | 182.08 | 83 | 35 | 16 | 55 | 3.05 | 16 | 1.95 | | | | | | | | |
| 39 | 206 | 197.29 | 186.79 | 83 | 35 | 16 | 55 | 3.15 | 16 | 2.05 | | | | | | | | |
| 40 | 211 | 202.33 | 192.17 | 83 | 35 | 16 | 55 | 3.25 | 16 | 2.15 | | | | | | | | |
| 41 | 216 | 207.38 | 197.07 | 83 | 35 | 16 | 55 | 3.40 | 16 | 2.25 | | | | | | | | |
| 42 | 221 | 212.43 | 202.27 | 83 | 35 | 16 | 55 | 3.50 | 16 | 2.40 | | | | | | | | |
| 44 | 231 | 222.53 | 212.37 | 83 | 35 | 16 | 55 | 3.70 | 16 | 2.60 | | | | | | | | |
| 45 | 237 | 227.58 | 217.28 | 83 | 35 | 16 | 55 | 3.80 | 16 | 2.70 | | | | | | | | |
| 48 | 252 | 242.73 | 232.57 | 83 | 35 | 16 | 55 | 4.20 | 16 | 3.10 | | | | | | | | |
| 49 | 257 | 247.78 | 237.49 | 83 | 35 | 16 | 55 | 4.35 | 16 | 3.27 | | | | | | | | |
| 50 | 262 | 252.83 | 242.67 | 83 | 35 | 16 | 55 | 4.50 | 16 | 3.40 | | | | | | | | |
| 54 | 282 | 273.02 | 262.86 | 83 | 35 | 16 | 55 | 5.05 | 16 | 3.95 | | | | | | | | |
| 60 | 312 | 303.33 | 293.17 | 83 | 35 | 16 | 55 | 6.00 | 16 | 4.90 | | | | | | | | |
| 64 | 333 | 323.53 | 313.37 | | 20 | | | | 20 | 5.60 | | | | | | | | |
| 65 | 338 | 328.58 | 318.33 | 93 | 40 | 20 | 63 | 7.40 | 20 | 5.75 | | | | | | | | |
| 68 | 353 | 343.74 | 333.58 | 93 | 40 | 20 | 63 | 7.94 | 20 | 6.32 | | | | | | | | |
| 70 | 363 | 353.84 | 343.68 | 93 | 40 | 20 | 63 | 8.30 | 20 | 6.70 | | | | | | | | |
| 72 | 373 | 363.94 | 353.78 | | 20 | | | | 20 | 7.05 | | | | | | | | |
| 75 | 388 | 379.10 | 368.86 | | 20 | | | | 20 | 7.70 | | | | | | | | |
| 80 | 414 | 404.36 | 394.20 | 93 | 40 | 20 | 63 | 9.35 | 20 | 8.70 | | | | | | | | |
| 85 | 439 | 429.62 | 419.39 | 98 | 45 | 20 | 66 | 12.00 | 20 | 9.70 | | | | | | | | |
| 90 | 464 | 454.88 | 444.72 | 98 | 45 | 20 | 66 | 13.20 | 20 | 11.00 | | | | | | | | |

NOTE:

- Data in colored box imply teeth hardening.
- Shaft hole, key groove and tap hole can be machined upon request.
- Other sprockets than listed may be manufactured. For details, contact us.
- Sprocket marked with ★ has a groove all the external circumference of boss. See Groove Dimension table above.