


Sprocket with one sided hub — 单搭链轮
for Roller-chains to DIN 8187 - ISO 05 B 8x3.0mm

Sprocket ISO 05 B
 Tooth width B₁—齿宽 2.8
 Tooth width B₂—齿宽 8.3
 Tooth width B₃—齿宽
 Chain
 Pitch—节距 8.0
 Inner width—内节内宽 3.0
 Roller-ø—滚子直径 5.0

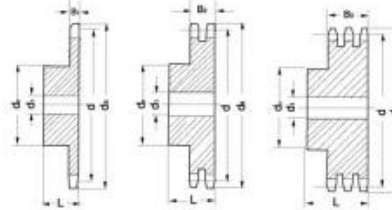

All measures in mm

齿数 Teeth	外径 Outer-ø	节径 Pitch-ø	单排 1-row			双排 2-rows			叁排 3-rows		
			d ₁	d ₂	L	d ₁	d ₂	L	d ₁	d ₂	L
8	24.0	20.90	13	6	12	12	6	18			
9	26.6	23.39	15	6	12	15	6	18			
10	29.2	25.89	17	6	12	17	8	18			
11	31.7	28.39	18	7	13	19	8	18			
12	34.2	30.91	20	7	13	21	8	18			
13	36.7	33.42	23	7	13	24	8	18			
14	39.2	35.95	25	7	13	26	8	18			
15	41.7	38.48	28	7	13	29	8	18			
16	44.3	41.01	30	8	14	32	10	20			
17	46.8	43.53	30	8	14	34	10	20			
18	49.3	46.07	30	8	14	37	10	20			
19	51.9	48.61	30	8	14	39	10	20			
20	54.4	51.14	30	8	14	40	10	20			
21	57.0	53.67	35	8	14	40	10	20			
22	59.5	56.21	35	8	14	40	10	20			
23	62.0	58.75	35	8	14	40	10	20			
24	64.6	61.29	35	8	14	40	10	20			
25	67.5	63.83	35	8	14	40	10	20			
26	69.5	66.37	40	10	16	50	12	22			
27	72.2	68.91	40	10	16	50	12	22			
28	74.8	71.45	40	10	16	50	12	22			
29	77.3	73.99	40	10	16	50	12	22			
30	79.8	76.53	40	10	16	50	12	22			
31	82.4	79.08	40	12	16	60	12	22			
32	84.9	81.61	40	12	16	60	12	22			
33	87.5	84.16	40	12	16	60	12	22			
34	90.0	86.70	40	12	16	60	12	22			
35	92.5	89.24	40	12	16	60	12	22			
36	95.0	91.79	40	12	16	60	12	22			
37	97.6	94.33	40	12	16	60	12	22			
38	100.2	96.88	40	12	16	60	12	22			
39	102.7	99.42	40	12	16	60	12	22			
40	105.2	101.97	40	12	16	60	12	22			
45	118.0	114.69	60	12	20						
50	130.7	127.41	60	12	20						
57	148.6	145.22	80	14	20						